



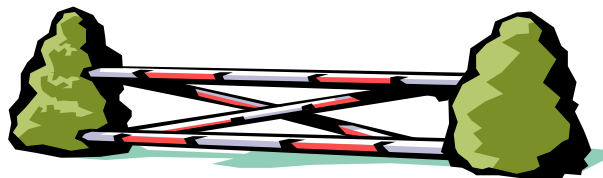
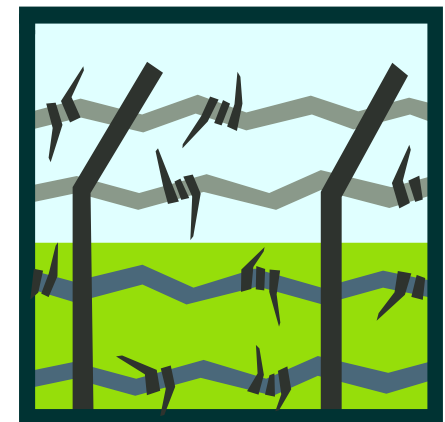
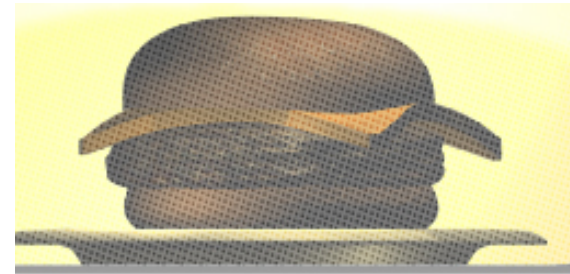
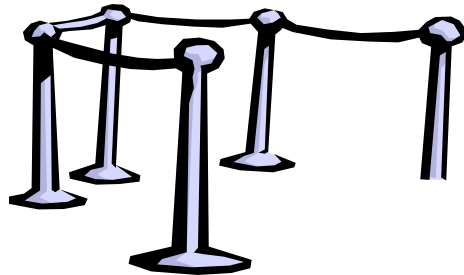
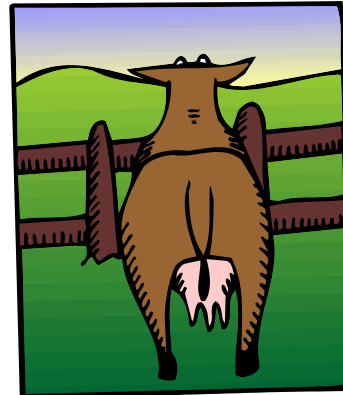


Scale



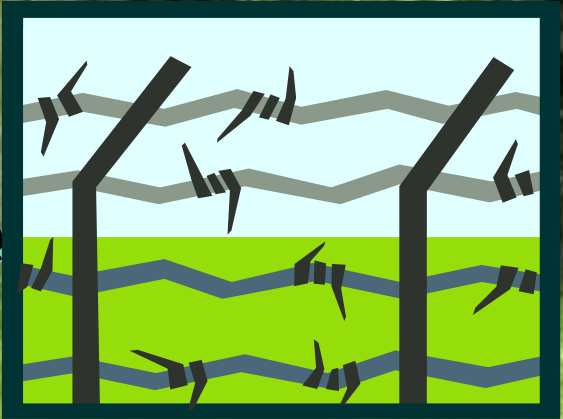

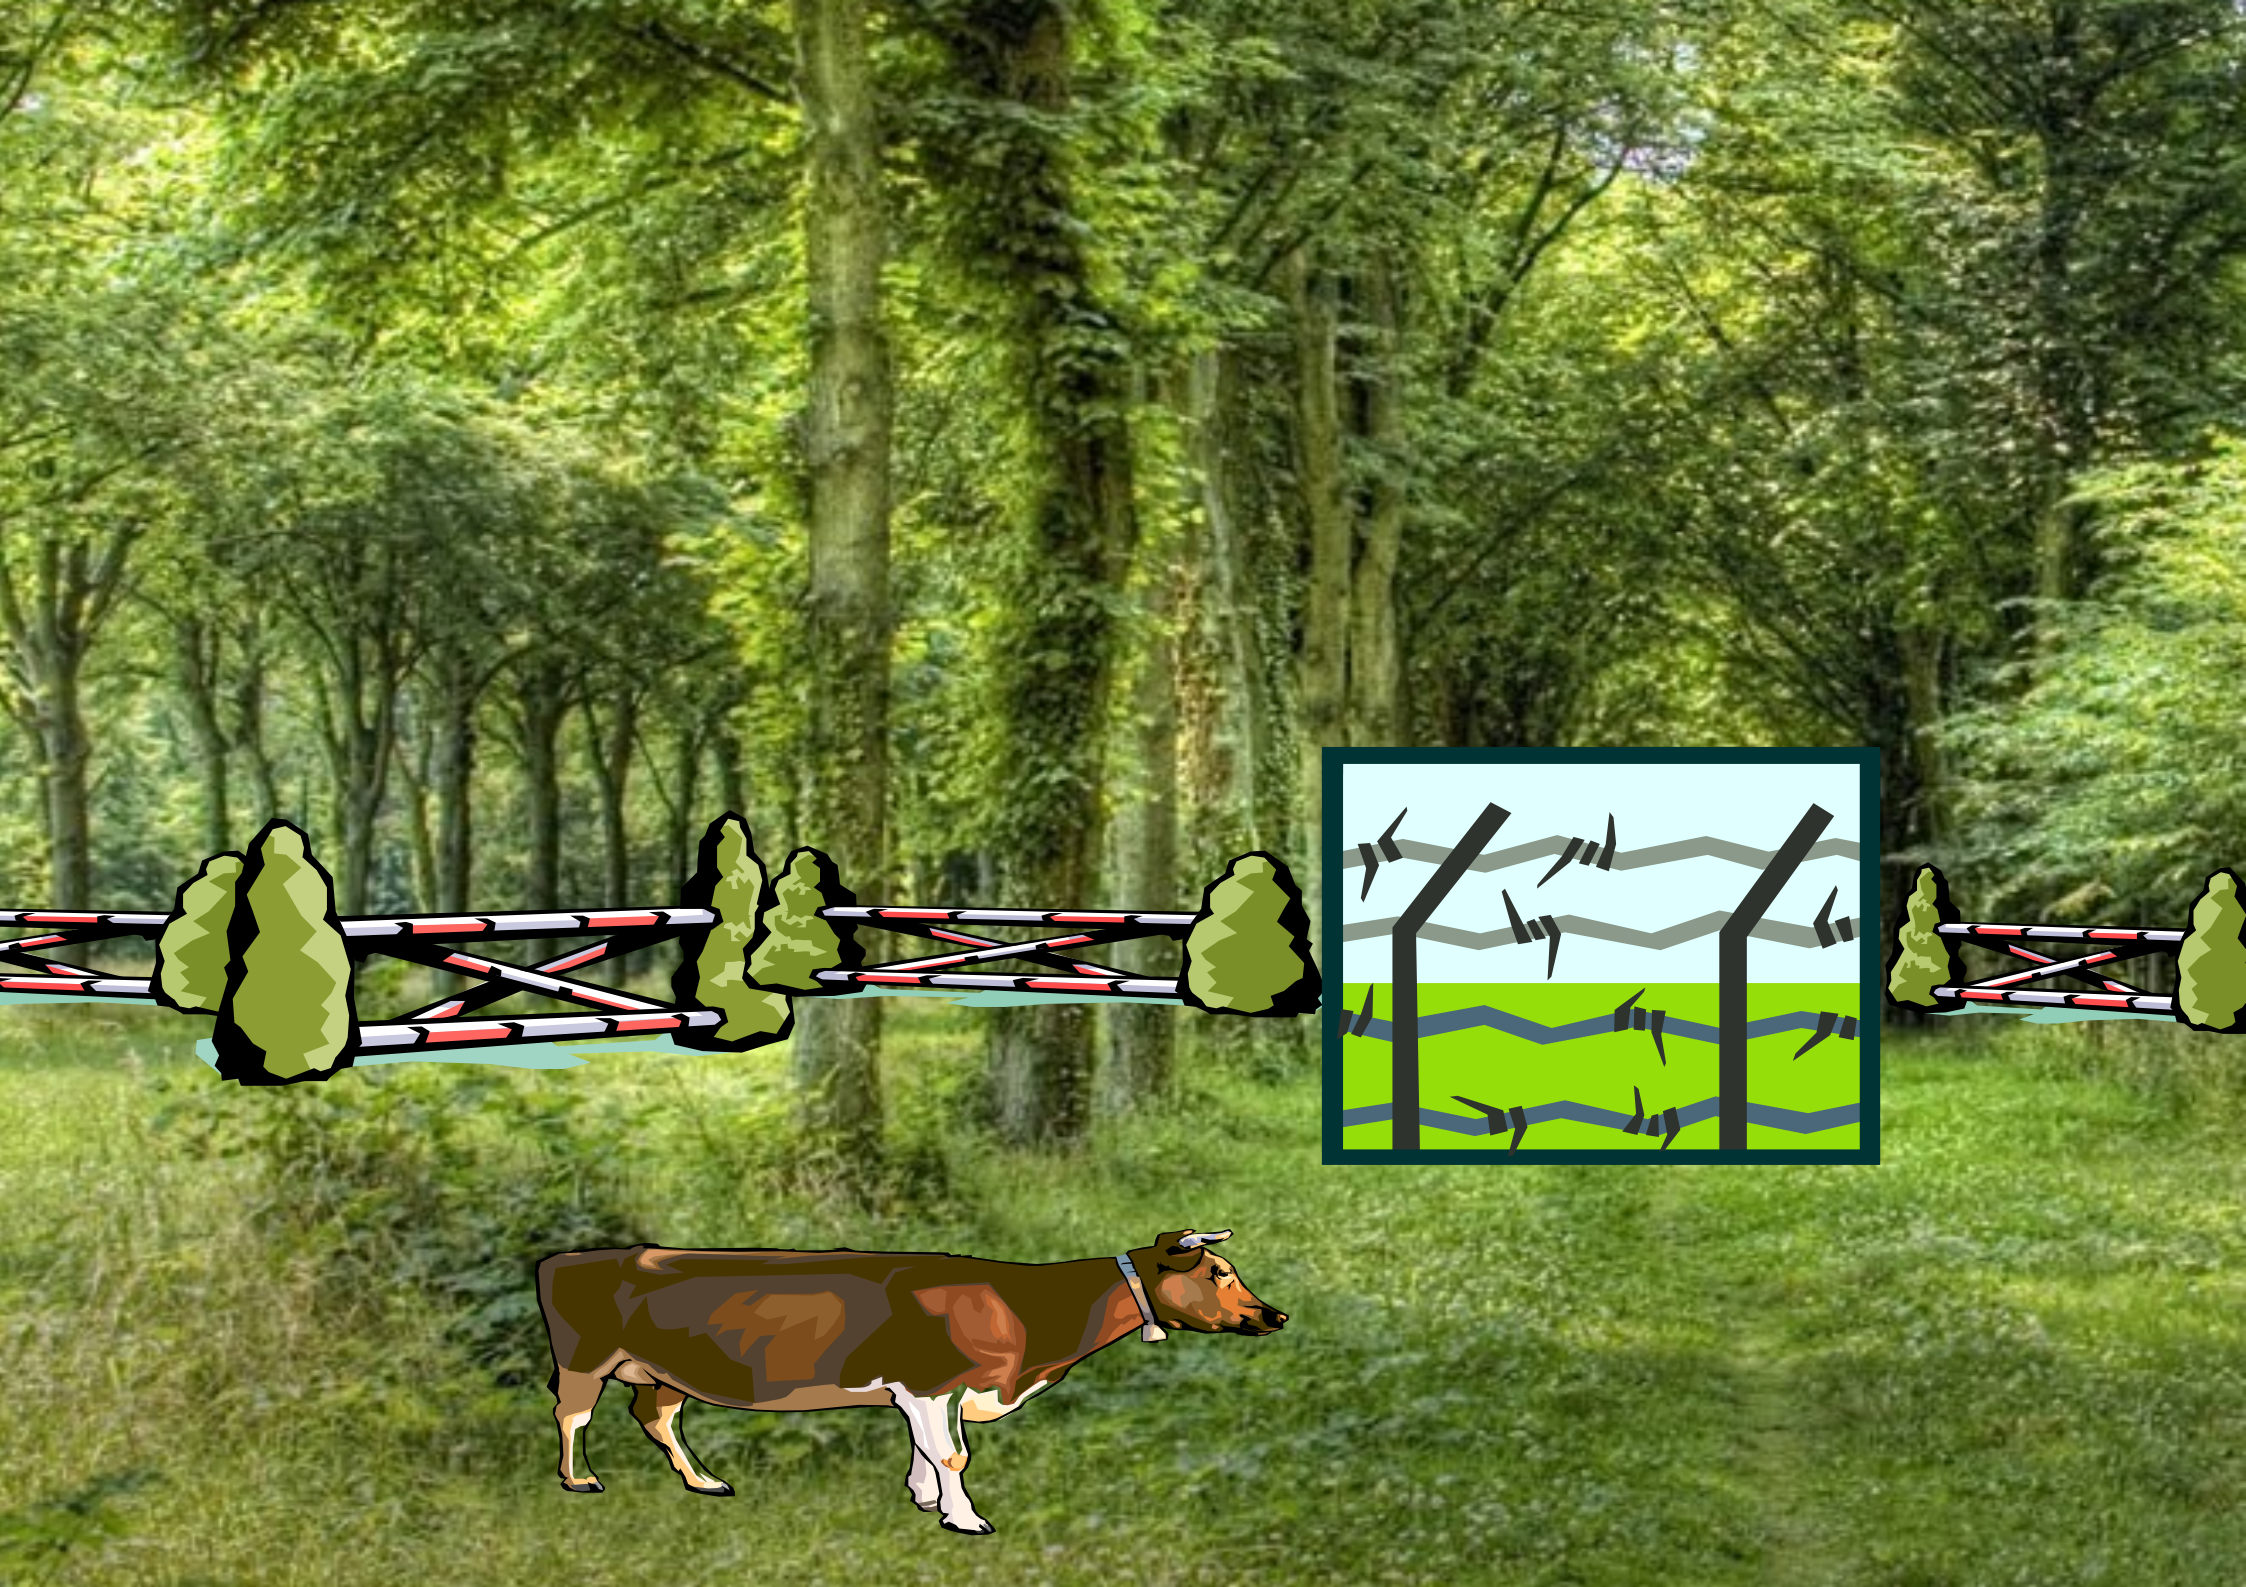

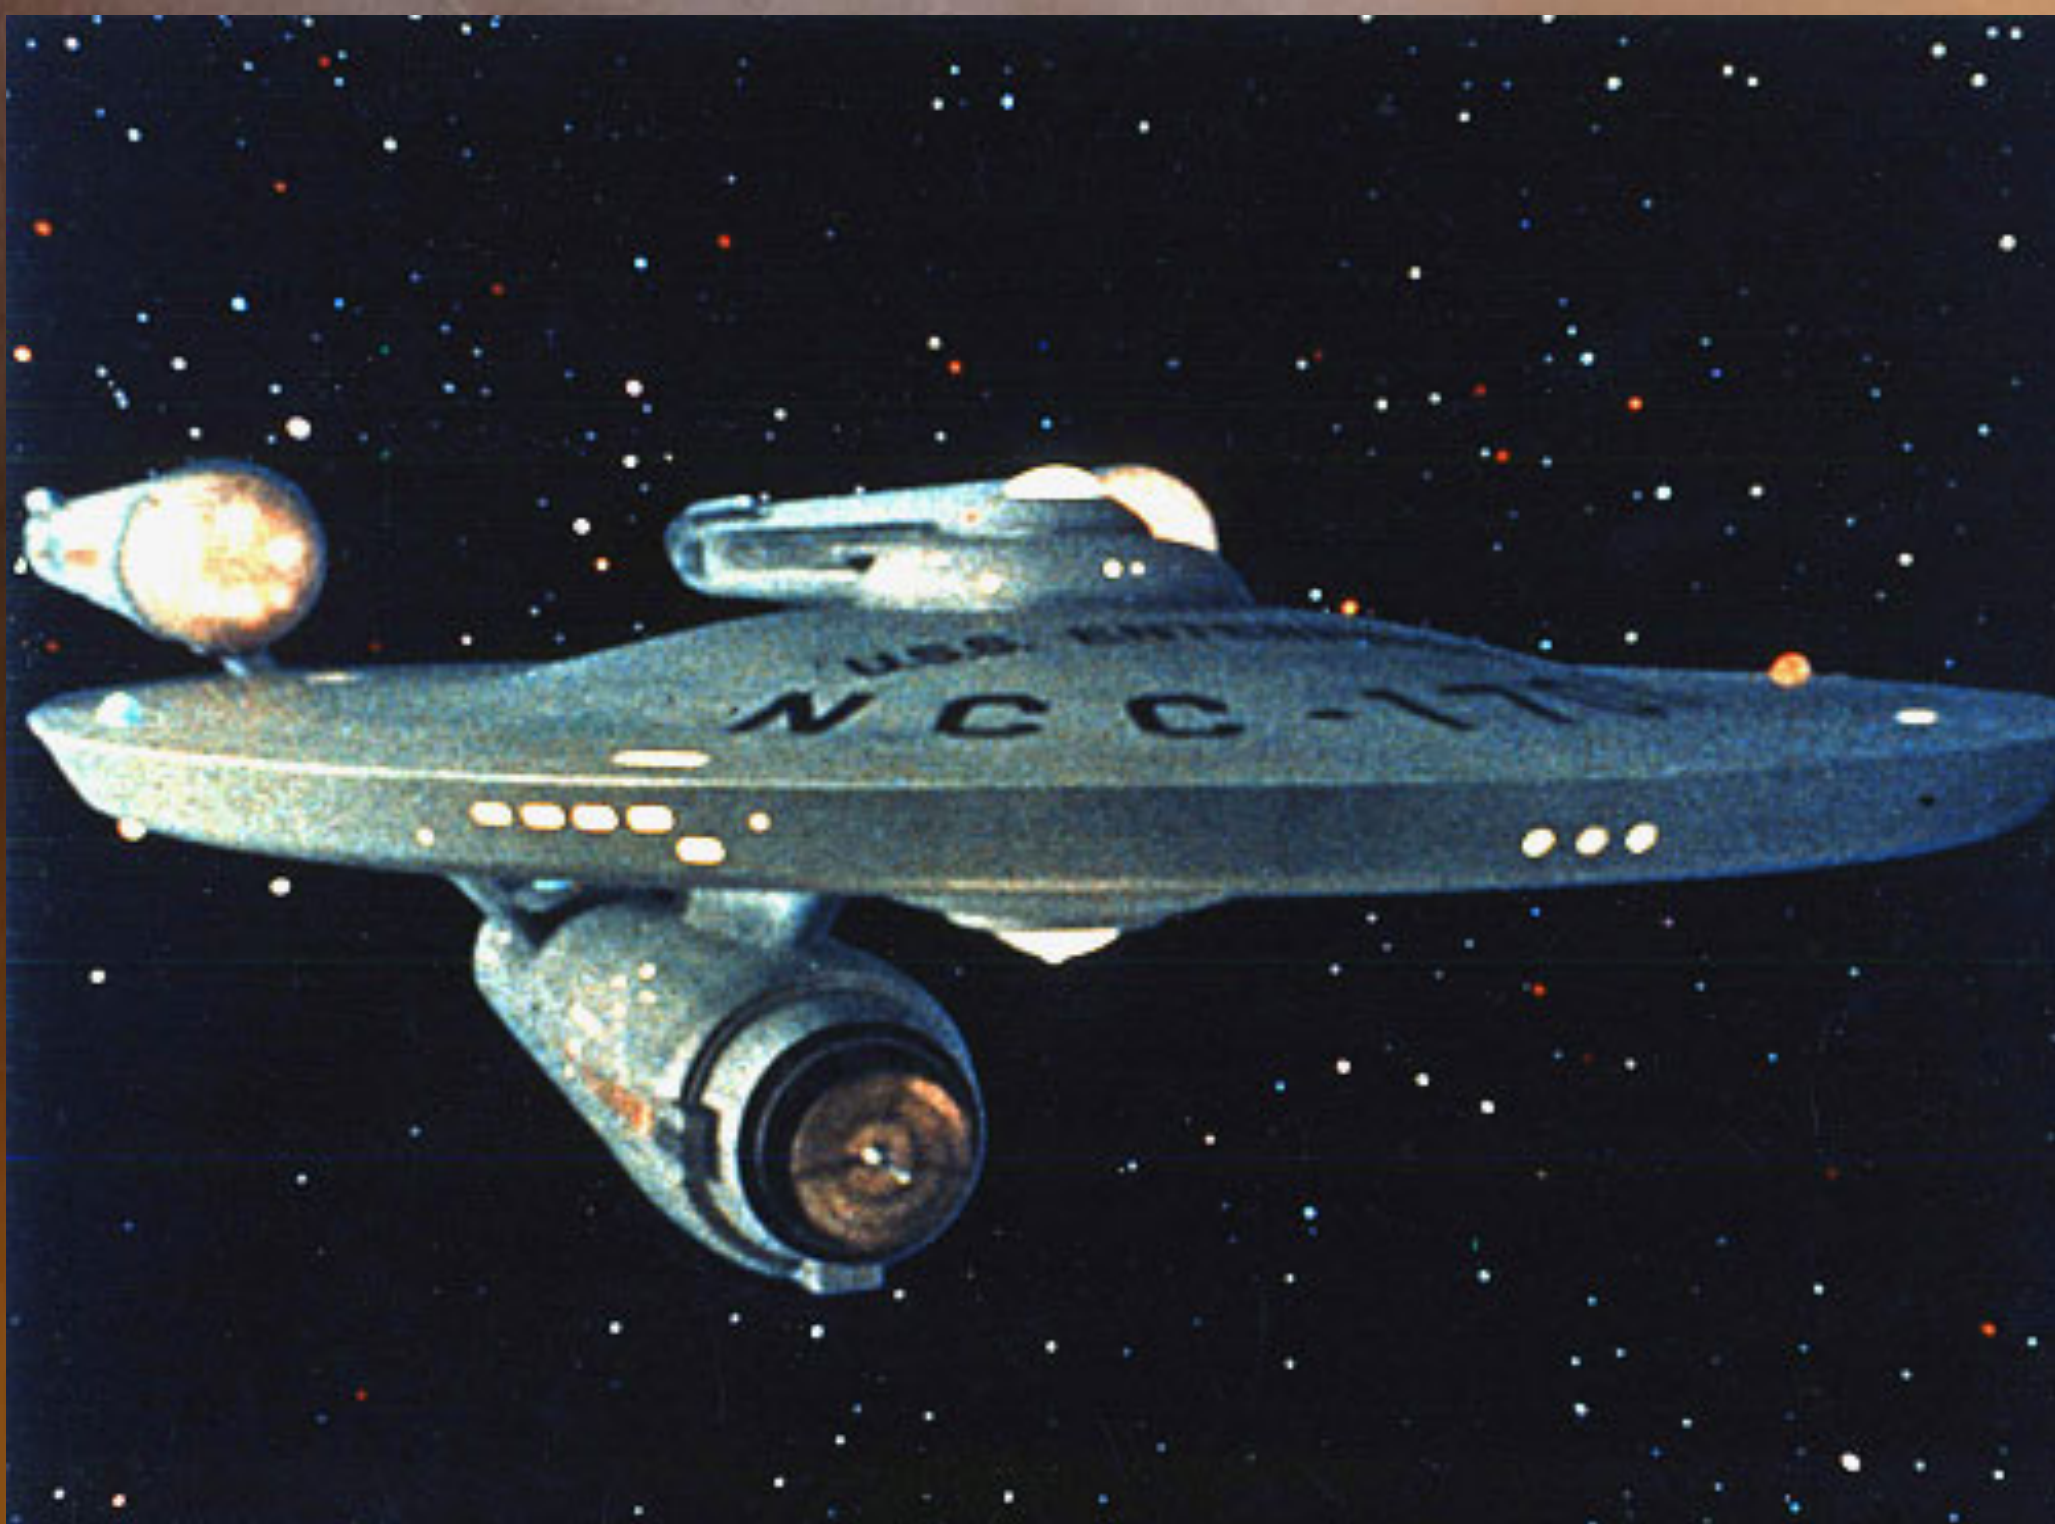


PARAMOUNT PICTURES

A brown monkey with large, wide eyes is clinging to a tree trunk. A green thought bubble is positioned to the left of the monkey's head, containing the text "I have Java. I don't have a problem." The monkey's hands are visible, gripping the tree trunk. The background is a blurred green forest.

I have Java.
I don't have
a problem.

← 八重洲南口
Yasui South Exit
八重洲南出口
八重洲南口
Yasui South Exit
八重洲南出口

ハイウェイバス
Highway Bus
八重洲口バスターミナル
Yasui Bus Terminal

タクシー
Taxi

東西線
Toei Line
南口バスターミナル
South Bus Terminal

丸の内線
Marunouchi Line
ほとバス
Hoto Bus

丸の内南口
Marunouchi South Exit
丸の内南出口
丸の内南口
Marunouchi South Exit
丸の内南出口

→

← 八重洲南口
Yasui South Exit
八重洲南出口
八重洲南口
Yasui South Exit
八重洲南出口

新幹線
Shinkansen

京葉線
Keiyo Line

7~10
東海道線
Tokaido Line


2・1
中央線
Chuo Line

横須賀・総武線
Yokosuka-Sobu Line
成田空港
Narita Airport

丸の内南口
Marunouchi South Exit
丸の内南出口
丸の内南口
Marunouchi South Exit
丸の内南出口

→



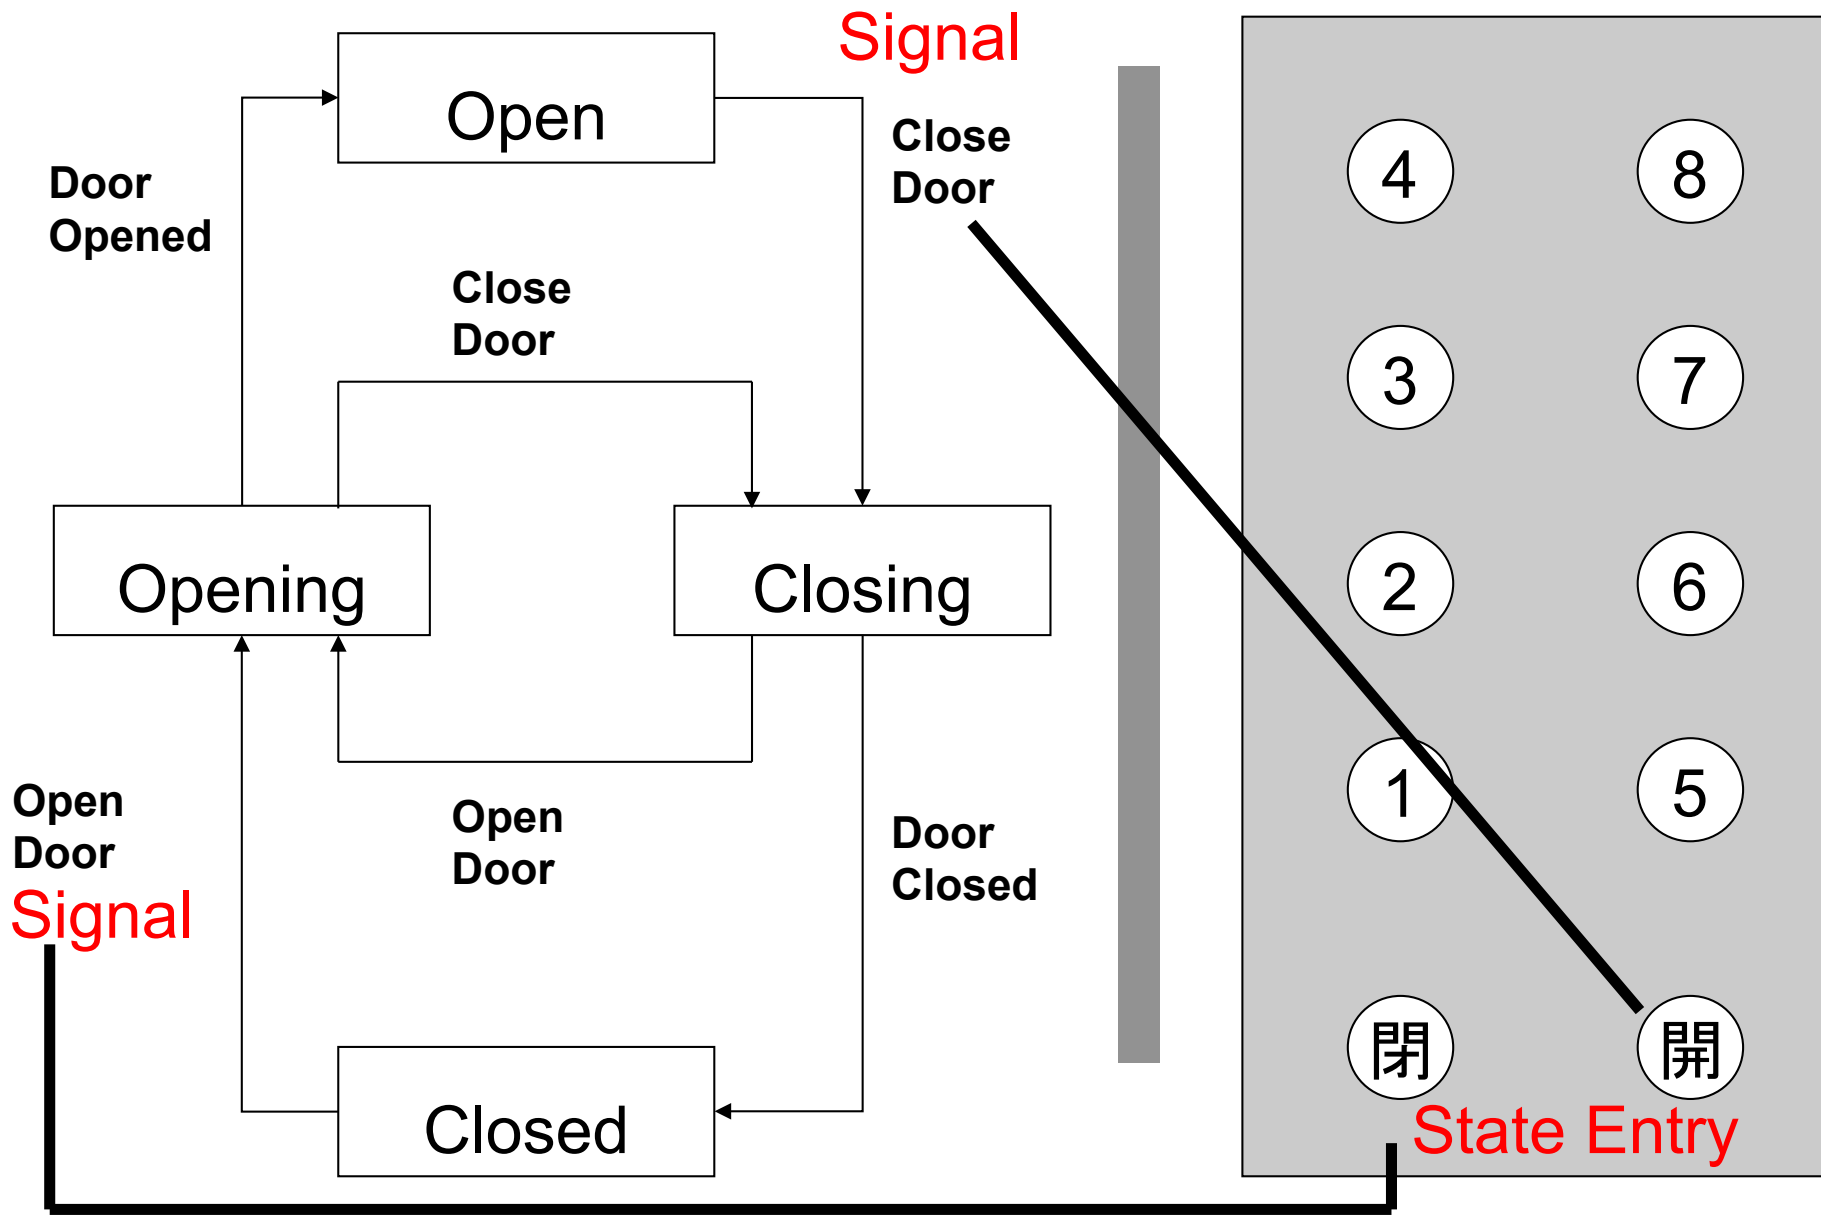

Reverse Osmosis Drinking Water System

Features:

All Units Are Made in USA
All Material FDA and/or NSF Complaint
Elegant Long Reach Faucet
High Output Membrane - 50 GPD (225 LPD)
Water Storage Tank (15 / 25 Lt.)
Pipe Adapter
Drain Valve
Automatic Shut-of-Valve
Flow Restrictor
Automatic Flush Valve

Options:

230V / 50Hz / 0.5mA Booster
Pump
UV Sterilizer
Water Quality Monitor
Pressure Gauge
Digital Flush Valve
Manual Flush Valve
Special 12V Adapter for
Water Quality Computer

Purification Stages & Filter Replacement:

Stage 1: 5 Micron Sediment Filter (replace +/- 6 monthly)
Stage 2: (N/A with 3 & 4 Stage RO System): Special Multi Media KDF Filter
(replace +/- 2 years) OR GAC Filter (replace +/- 1 year)
Stage 3: 1 Micron Sediment / Carbon Block Filter (replace 1 - 2 years)
Stage 4: 0,0001 Micron TFC Membrane (Effectively remove all impurities incl. \\
Bacteria, harmful Dissolved Solids, poisons and chemicals. (10 -25 years)
Stage 5: Activated Carbon Polishing Filter for Taste and odor removal (2 - 3 years)
Stage 6: De-ionization Filter (1 year)
Stage 7: (Optional) : Ultra Violet Treatment

NB! Replacement rate on the Filters & Membrane will be determined by the flow

StephenMellor@StephenMellor.com

